

Mistiya Electronics Inc.

www.mistiya.com

**Mistiya Electronics Inc.
10706 - 33a Avenue
Edmonton, Alberta
Canada T6J 3B7**


**Tel (403) 852-4062
Fax (780) 439-0256**

UNITECH LITHIUM BATTERY

Manganese Dioxide Lithium Battery(Li/SOCL2)



MODEL: ER26500

DISCHARGE CHARACTERISTICS @23±2°C

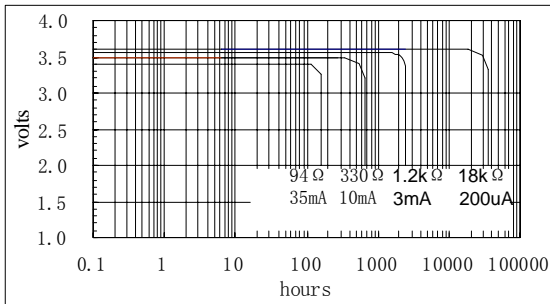


- Nominal capacity @3mA to20V 7.5Ah
- Nominal voltage 3.6V
- Maximum current 230mA
- Maximum pulse current 400mA
- Weight 52g
- Volume 36cc
- Operating temperature -55~85°C

VOLTAGE VS. CURRENT

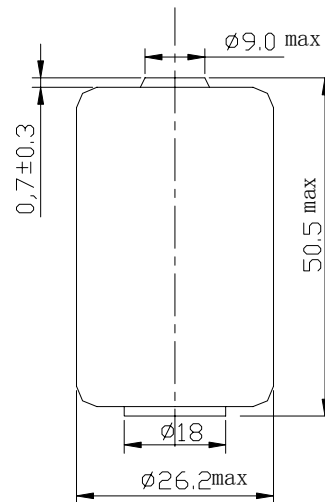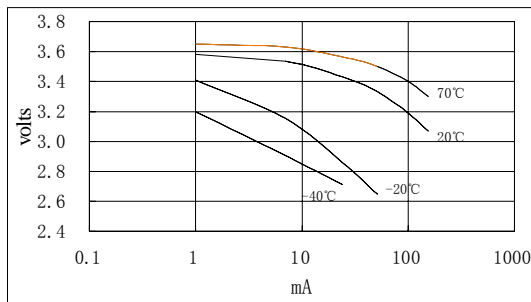

CAPACITY VS. CURRENT

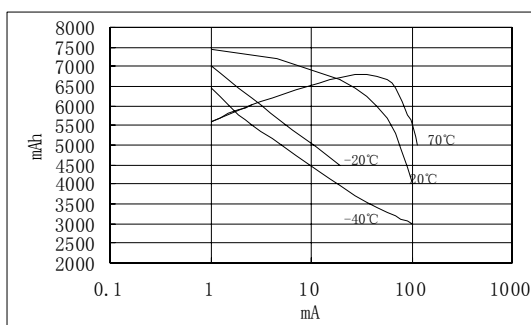

Dimensions in mm

S/: STANDARD

Available terminations:

- /p AXIAL PINS
- /T/PT2 RADIAL PINS
- /PT/TP POLAREZD TABS

Warning:

- .Do not short-circuit;
- .Do not recharge, force over-discharge, assemble / disassemble and crush; risk of fire and burns;
- .Do not use under temperature above specified range

Tel:86-755-28509555 Fax:86-755-28506266

E-mail: unitech@unitechbatt.com

Http:www.unitechbatt.com

UNITECH BATTERY LIMITED